




# NOR GATE AS UNIVERSAL GATE

MODEL - DLG15

This trainer explains that how NAND gates can be used to make any basic gate.

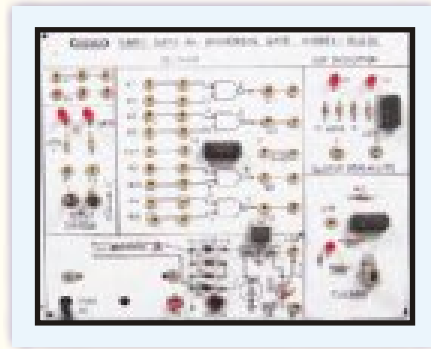

## SPECIFICATIONS

1. Power supply requirement : 230V AC, 50 Hz.
2. Built in IC based regulated Power supply : +5 V DC/200 mA.
3. Following parts provided on Single PCB with connecting terminals.  
NOR GATE - IC 7402 - 1 No.
4. High /Low switches : 4 Nos provided to apply 0 and 1 level
5. Logic output Indicators : 4 LEDs provided for output level indication.
6. Standard Accessories :
  1. User Manual with practical and circuit diagrams.
  2. Connecting patch cords

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

**Sigma Trainers**  
**E-103, Jai Ambe Nagar,**  
**Near Udgam School, Thaltej,**  
**AHMEDABAD - 380054.**

**Phone : 079-26852427 / 26767512**  
**Fax : 079-26840290 / 26759661**  
**ISDN : 079-26859162 / 26853758**  
**Email : sales@sigmatrainers.com**  
**: sigmatrainers@sify.com**  
**Web : www.sigmatrainers.com**

**Dealer:-**