




BASIC LOGIC GATES USING DIODE AND TRANSISTORS

MODEL - DLG16

This board has been designed with a view to provide practical and experimental knowledge of Basic logic gates.

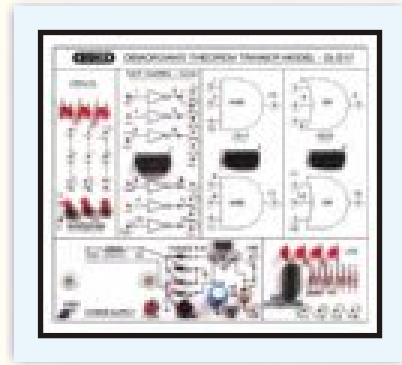

SPECIFICATIONS

1. Power supply requirement : 230V AC, 50 Hz.
2. Built in IC based regulated Power supply - 0-5 V DC/200 mA.
3. Following parts provided on Single PCB with connecting terminals.
NOT Gates
AND Gates
OR Gates
4. High /Low switches : 4 Nos provided to apply 0 and 1 level
5. Logic output Indicators : 4 LEDs provided for output level indication.
6. Clock generator : Variable from 1 Hz to 10 Hz
7. Standard Accessories :
 1. User Manual with practical and circuit diagrams.
 2. Connecting patch cords

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

Sigma Trainers
E-103, Jai Ambe Nagar,
Near Udgam School, Thaltej,
AHMEDABAD - 380054.

Phone : 079-26852427 / 26767512
Fax : 079-26840290 / 26759661
ISDN : 079-26859162 / 26853758
Email : sales@sigmatrainers.com
: sigmatrainers@sify.com
Web : www.sigmatrainers.com

Dealer:-