




CHARACTERISTICS OF VARISTOR (VDR)

MODEL - TH02

This trainer has been designed with a view to provide practical & experimental knowledge of VDR.

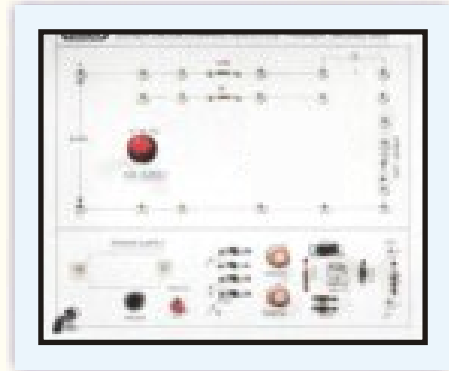

SPECIFICATIONS

1. Power supply requirement : 230V AC, 50 Hz.
2. Built in IC based regulated Power supply : 0-24V DC/200 mA continuously variable.
3. Following parts provided on Single PCB with connecting terminals.
Varistor (VDR) - 1 No.
100 Ohm Resistors
1K-Ohm Variable Resistor
4. All parts are soldered on single PCB of size 8" x 7" with complete circuit diagram Screen printed.
5. Standard Accessories : User Manual with practical and circuit diagrams.
Connecting patch cords.

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

Sigma Trainers and Kits
E-113, Jai Ambe Nagar,
Near Udgam School,
Thaltej,
AHMEDABAD - 380054.
INDIA.

Phone(O): +91-79-26852427/ 26850829
Phone(F): +91-79-26767512/ 26767648
Fax : +91-79-26840290/ 26840290
Mobile : +91-9824001168
Email : sales@sigmatrainers.com
: sigmatrainers@sify.com
Web : www.sigmatrainers.com

Dealer:-